
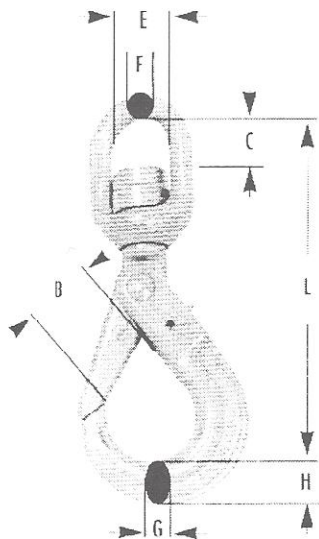


GUNNEBO SAFETY HOOKS

SAFETY HOOKS with BRONZE BUSHINGS (SWIVEL EYE TYPE)

CODE	CHAIN SIZE	WORKING LOAD LIMIT *(LBS)	DIMENSIONS (INCHES)							WEIGHT EACH (LBS)
			L	B	C	E	F	G	H	
BKL-5/6-8	7/32	2,100	5.9	1.1	.91	1.3	.43	.55	.75	1.4
BKL-7/8-8	1/4	3,500	7.2	1.4	1.1	1.4	.47	.67	.91	2.4
BKL-10-8	3/8	7,100	8.6	1.7	1.5	1.7	.59	.99	1.1	4.4
BKL-13-8	1/2	12,000	10.9	2.1	1.7	1.9	.75	1.1	1.5	8.4
BKL-16-8	5/8	18,100	13.2	2.5	2.3	2.4	.87	1.5	1.9	15.0

* Design factor: 4:1 Proof tested and certified.

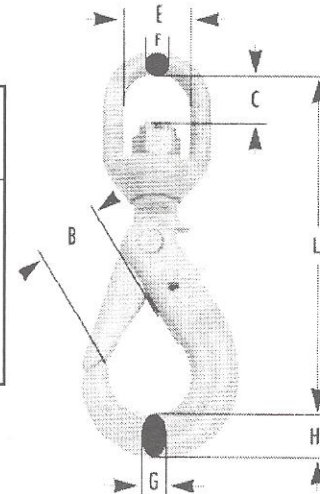

SAFETY HOOKS with BALL BEARINGS (SWIVEL EYE TYPE)

CODE	CHAIN SIZE	WORKING LOAD LIMIT *(LBS)	DIMENSIONS (INCHES)							WEIGHT EACH (LBS)
			L	B	C	E	F	G	H	
BKLK-5/6-8	7/32	2,100	5.8	1.1	.87	1.3	.43	.55	.75	1.5
BKLK-7/8-8	1/4	3,500	7.2	1.4	1.1	1.4	.47	.67	.91	2.4
BKLK-10-8	3/8	7,100	8.5	1.7	1.3	1.6	.59	.99	1.1	4.2
BKLK-13-8	1/2	12,000	10.9	2.1	1.6	1.9	.75	1.1	1.5	8.4
BKLK-16-8	5/8	18,100	13.2	2.5	2.0	2.4	.87	1.5	1.9	15.9


* Design factor: 4:1 Proof tested and certified.

SWIVEL SLING HOOKS with LATCH & BRONZE BUSHINGS (EYE TYPE)

CODE	CHAIN SIZE	WORKING LOAD LIMIT *(LBS)	DIMENSIONS (INCHES)							WEIGHT EACH (LBS)
			L	B	G	C	H	E	F	
LKN-7/8-8	1/4	3,500	6.1	1.0	.7	1.1	.8	1.4	.5	1.9
LKN-10-8	3/8	7,100	7.4	1.4	.9	1.5	1.1	1.7	.6	3.3
LKN-13-8	1/2	12,000	9.2	1.7	1.1	1.7	1.4	1.9	.7	6.6
LKN-16-8	5/8	18,100	11.0	1.9	1.3	2.3	1.7	2.4	.9	11.2

* Design factor: 4:1 Proof tested and certified.


Alloy Hooks

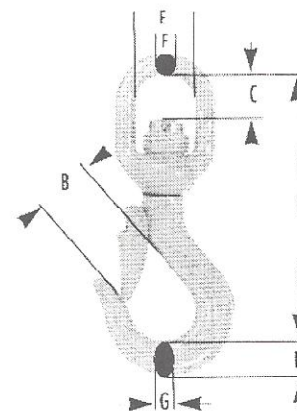



One Sheave Snatch Block with Hook

4 through 30-ton capacities • 4 to 1 design factor • 4 through 24-inch diameters

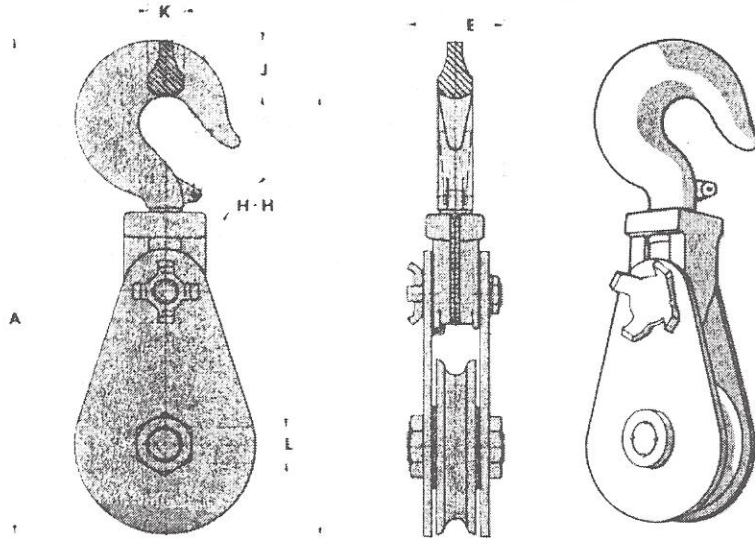

- A Overall Length
- B Net Length
- E Thickness
- F Width
- H1 Throat Opening -
No Latch
- H2 Throat Opening -
Light Duty
- J Hook Thickness
- K Hook Width
- L Center Pin Dia.
- M Sheave Dia.

MODEL NO.	STANDARD WIRE ROPE SIZE	MAXIMUM ALLOW.	WT.	A	B	E	F	H1	H2	J	K	L	M
-----------	-------------------------	----------------	-----	---	---	---	---	----	----	---	---	---	---

4-TON 1-SHEAVE SNATCH BLOCKS, WITH HOOK, 4-14 INCHES

SB4S6BH	3/8-1/2	3/4	18	16.625	14.750	3.281	6.250	1.437	1.250	1.875	1.125	1	6
SB4S6RH	3/8-1/2	3/4	18	16.625	14.750	3.281	6.250	1.437	1.250	1.875	1.125	1	6
SB4S8BH	3/8-1/2	3/4	22	18.625	16.750	3.281	8.250	1.437	1.250	1.875	1.125	1	8
SB4S8RH	3/8-1/2	3/4	22	18.625	16.750	3.281	8.250	1.437	1.250	1.875	1.125	1	8
SB4S10BH	3/8-1/2	3/4	34	20.625	18.750	3.281	10.250	1.437	1.250	1.875	1.125	1.250	10
SB4S10RH	3/8-1/2	3/4	34	20.625	18.750	3.281	10.250	1.437	1.250	1.875	1.125	1.250	10
SB4S12BH	3/8-1/2	7/8	39	22.625	20.750	3.281	12.250	1.437	1.250	1.875	1.125	1.250	12
SB4S12RH	3/8-1/2	7/8	39	22.625	20.750	3.281	12.250	1.437	1.250	1.875	1.125	1.250	12

8-TON 1-SHEAVE SNATCH BLOCKS, WITH HOOK, 6-14 INCHES

SB8S6BH	5/8-3/4	1	29	19	16.875	3.687	6.250	2	1.750	2.125	1.375	1.500	6
SB8S6RH	5/8-3/4	1	29	19	16.875	3.687	6.250	2	1.750	2.125	1.375	1.500	6
SB8S8BH	5/8-3/4	7/8	32	21	18.875	3.687	8.250	2	1.750	2.125	1.375	1.500	8
SB8S8RH	5/8-3/4	7/8	32	21	18.875	3.687	8.250	2	1.750	2.125	1.375	1.500	8
SB8S10BH	5/8-3/4	3/4	40	23	20.875	3.687	10.250	2	1.750	2.125	1.375	1.500	10
SB8S10RH	5/8-3/4	3/4	40	23	20.875	3.687	10.250	2	1.750	2.125	1.375	1.500	10
SB8S12BH	5/8-3/4	7/8	46	25	22.875	3.687	12.250	2	1.750	2.125	1.375	1.500	12
SB8S12RH	5/8-3/4	7/8	46	25	22.875	3.687	12.250	2	1.750	2.125	1.375	1.500	12


12-TON 1-SHEAVE SNATCH BLOCKS, WITH HOOK, 6-16 INCHES

SB12S6BH	3/4-7/8	1-1/8	42	20.750	18.125	4.375	6.250	2.500	2.125	2.625	1.625	2	6
SB12S6RH	3/4-7/8	1-1/8	42	20.750	18.125	4.375	6.250	2.500	2.125	2.625	1.625	2	6
SB12S8BH	3/4-7/8	1-1/8	53	22.750	20.125	4.375	8.250	2.500	2.125	2.625	1.625	2	8
SB12S8RH	3/4-7/8	1-1/8	53	22.750	20.125	4.375	8.250	2.500	2.125	2.625	1.625	2	8
SB12S10BH	3/4-7/8	1-1/8	66	24.750	22.125	4.375	10.250	2.500	2.125	2.625	1.625	2	10
SB12S10RH	3/4-7/8	1-1/8	66	24.750	22.125	4.375	10.250	2.500	2.125	2.625	1.625	2	10
SB12S12BH	3/4-7/8	1-1/8	75	26.750	24.125	4.375	12.250	2.500	2.125	2.625	1.625	2	12
SB12S12RH	3/4-7/8	1-1/8	75	26.750	24.125	4.375	12.250	2.500	2.125	2.625	1.625	2	12



One Sheave Snatch Block with Shackle

4 through 30-ton capacities • 4 to 1 design factor • 4 through 24-inch diameters

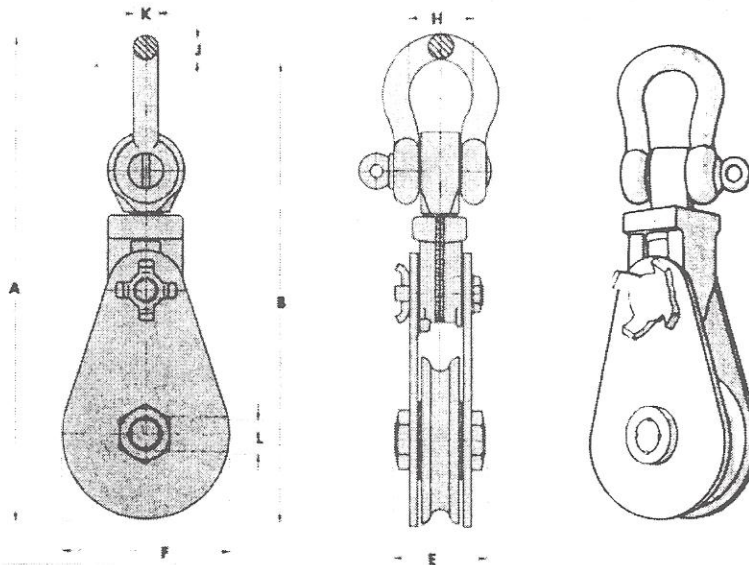

- A Overall Length
- B Net Length
- E Thickness
- F Width
- H Inside Width of Shackle
- J Shackle Thickness
- K Shackle Width
- L Center Pin Dia.
- M Sheave Dia.

MODEL NO.	STANDARD WIRE ROPE SIZE	MAXIMUM ALLOW.	WT.	A	B	E	F	H	J	K	L	M
4-TON 1-SHEAVE SNATCH BLOCKS, WITH SHACKLE, 4-14 INCHES												
SB4S4BS	3/8-1/2	3/4	15	14.375	13.500	3.281	4.750	2.250	.875	.875	1	4
SB4S4RS	3/8-1/2	3/4	15	14.375	13.500	3.281	4.750	2.250	.875	.875	1	4
SB4S6BS	3/8-1/2	3/4	18	16.500	15.625	3.281	6.250	2.250	.875	.875	1	6
SB4S6RS	3/8-1/2	3/4	18	16.500	15.625	3.281	6.250	2.250	.875	.875	1	6
SB4S8BS	3/8-1/2	3/4	22	18.500	17.625	3.281	8.250	2.250	.875	.875	1	8
SB4S8RS	3/8-1/2	3/4	22	18.500	17.625	3.281	8.250	2.250	.875	.875	1	8
SB4S10BS	3/8-1/2	3/4	34	20.500	19.625	3.281	10.250	2.250	.875	.875	1.250	10
SB4S10RS	3/8-1/2	3/4	34	20.500	19.625	3.281	10.250	2.250	.875	.875	1.250	10
SB4S12BS	3/8-1/2	7/8	39	22.500	21.625	3.281	12.250	2.250	.875	.875	1.250	12
SB4S12RS	3/8-1/2	7/8	39	22.500	21.625	3.281	12.250	2.250	.875	.875	1.250	12
8-TON 1-SHEAVE SNATCH BLOCKS, WITH SHACKLE, 6-14 INCHES												
SB8S6BS	5/8-3/4	1	29	19.250	18.250	3.687	6.250	2.562	1	1	1.500	6
SB8S6RS	5/8-3/4	1	29	19.250	18.250	3.687	6.250	2.562	1	1	1.500	6
SB8S8BS	5/8-3/4	7/8	33	21.250	20.250	3.687	8.250	2.562	1	1	1.500	8
SB8S8RS	5/8-3/4	7/8	33	21.250	20.250	3.687	8.250	2.562	1	1	1.500	8
SB8S10BS	5/8-3/4	3/4	41	23.250	22.250	3.687	10.250	2.562	1	1	1.500	10
SB8S10RS	5/8-3/4	3/4	41	23.250	22.250	3.687	10.250	2.562	1	1	1.500	10
SB8S12BS	5/8-3/4	7/8	46	25.250	24.250	3.687	12.250	2.562	1	1	1.500	12
SB8S12RS	5/8-3/4	7/8	46	25.250	24.250	3.687	12.250	2.562	1	1	1.500	12
12-TON 1-SHEAVE SNATCH BLOCKS, WITH SHACKLE, 6-16 INCHES												
SB12S6BS	3/4-7/8	1-1/8	42	21.250	20	4.375	6.250	3.125	1.250	1.250	2	6
SB12S6RS	3/4-7/8	1-1/8	42	21.250	20	4.375	6.250	3.125	1.250	1.250	2	6
SB12S8BS	3/4-7/8	1-1/8	53	23.250	22	4.375	8.250	3.125	1.250	1.250	2	8
SB12S8RS	3/4-7/8	1-1/8	53	23.250	22	4.375	8.250	3.125	1.250	1.250	2	8
SB12S10BS	3/4-7/8	1-1/8	66	25.250	24	4.375	10.250	3.125	1.250	1.250	2	10
SB12S10RS	3/4-7/8	1-1/8	66	25.250	24	4.375	10.250	3.125	1.250	1.250	2	10
SB12S12BS	3/4-7/8	1-1/8	75	27.250	26	4.375	12.250	3.125	1.250	1.250	2	12
SB12S12RS	3/4-7/8	1-1/8	75	27.250	26	4.375	12.250	3.125	1.250	1.250	2	12