



# BAKER FLOAT VALVE DIMS

VALVE SIZE	VALVE DIA. (D)	BORE FOR VALVE (DIA + 1/32") (R)	VALVE LENGTH (L)	VALVE LENGTH + PIN LENGTH + 1/4" (DEPTH OF BORE) (A)	MODEL F ID	MODEL G ID
1R	1-21/32"	1-11/16"	5-7/8"	2-3/8 REG=9-1/8"	1"	NA
1F-2R	1-29/32"	1-15/16"	6-1/4"	2-7/8 REG=10" 2-3/8 IF= 9-1/2"	1-1/4"	1"
2F-3R	2-13/32"	2-7/16"	6-1/2"	3-1/2 REG=10-1/2" 2-7/8 IF= 10-1/4"	1-9/16"	1-1/4"
3-1/2 IF	3-1/8"	3-5/32"	10"	3-1/2 IF=14-1/4"	1-7/8"	1-5/8"
4R	3-15/32"	3-1/2"	8-5/16"	4-1/2 REG=12-13/16"	2-5/16"	1-31/32"
5F-6R	4-25/32"	4-13/16"	11-3/4"	6-5/8 REG=17"	3-1/4"	2-7/8"

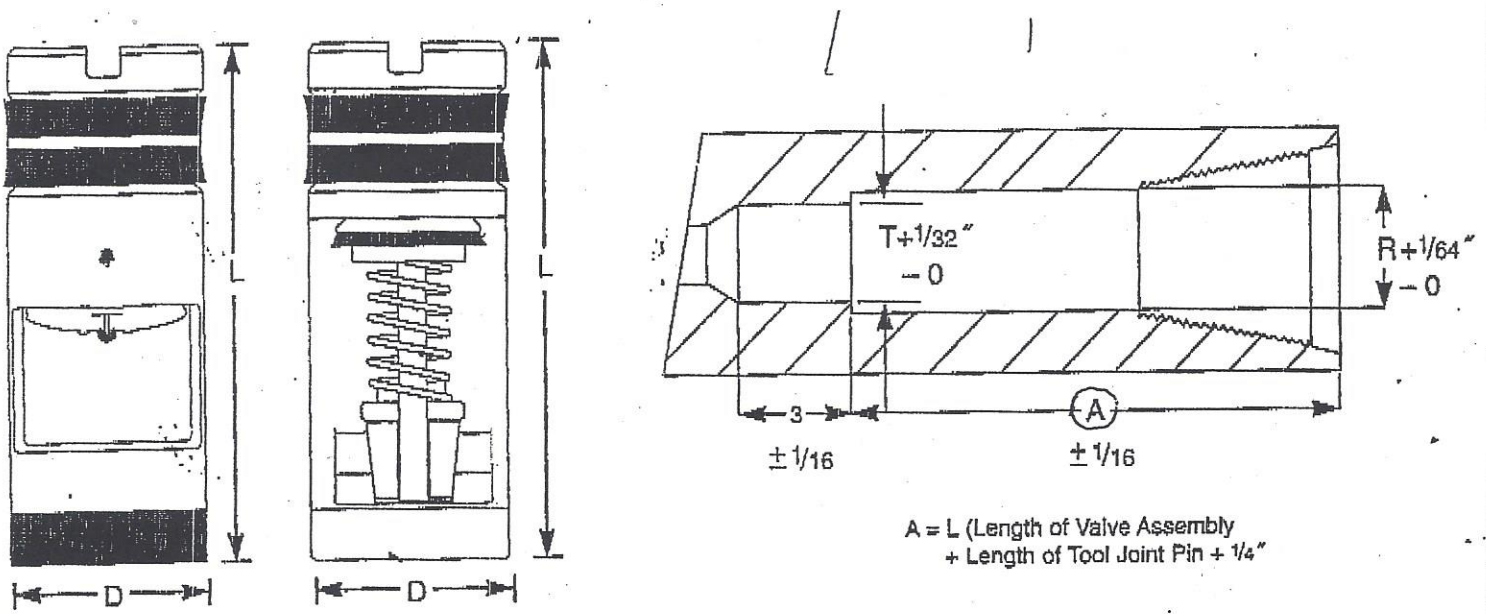

# FV - FLOAT VALVE

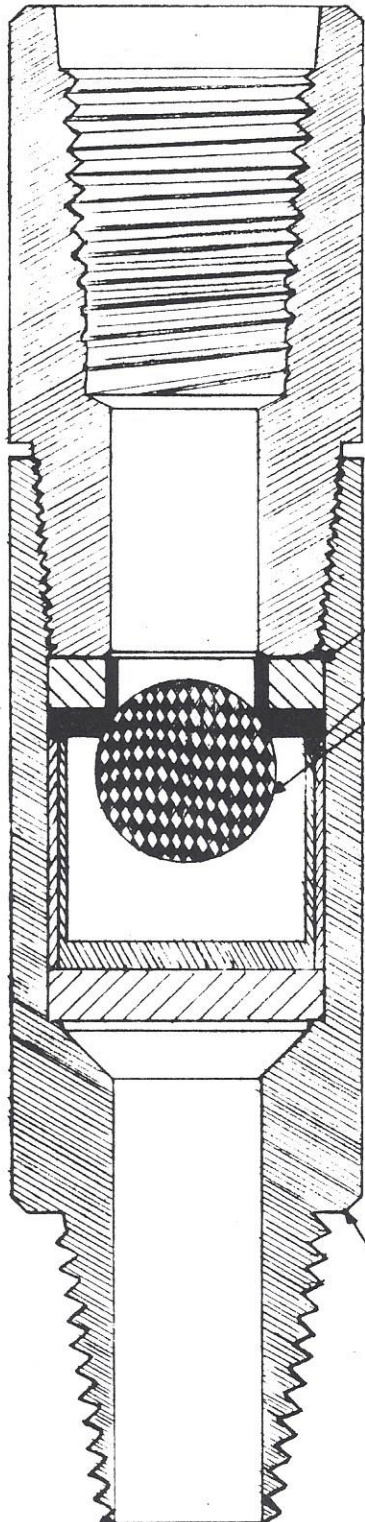

UPPER BODY  
REPLACEABLE

NOTE:

( OTHER THREADS

~~MADE~~ MADE

ON REQUEST )

FV-3 SEAT

FV-4 CAGE

FV-5 BALL

REPLACEMENT UNIT NUMBER

LOWER BODY  
REPLACEABLE

ASSEMBLY PART NUMBER	THREAD SIZE TOP & BOTTOM	O.D. SIZE
FVF-44M	2 3/8" FILING	3 3/4"
FVF-55M	2 7/8" FILING	3 3/4"
FVF-66A	MANU REG.	3 3/4"
FVF-77M	2 1/3" FULL HOLE	3 3/4"
FVF-88M	2 3/8" I.F.	3 3/4"
FVF-99M	2 7/8" I.F.	4 1/4"

DATE 3/24/80

UNIT: FV - FLOAT VALVE ASM.