

NDS Drilling Supply, Inc.
26041 Newton Circle
Elko, MN 55020
(952) 461-3400


P8

w/4-1/2" API Reg Pin

Wt. 448 lbs.

EP8-STD-Hammer

TAKES QL80 SHANKS – NO FOOT VALVE

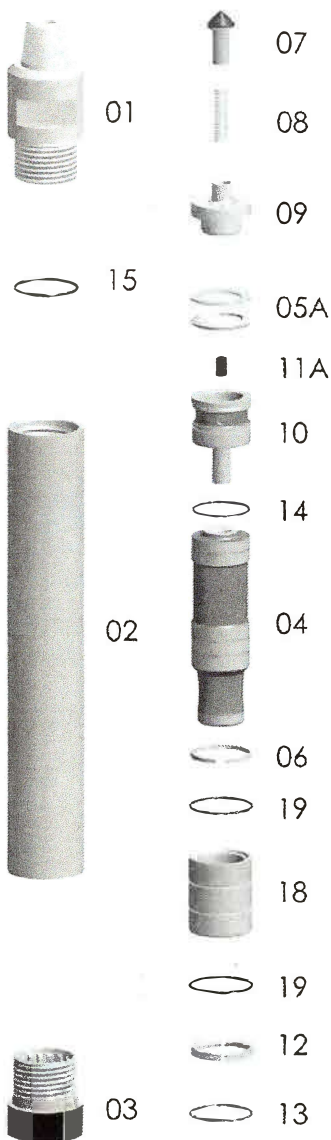

Replacement Parts

Hmr Part #	Description	Order #	Weight (lbs.)
P8-01	Top Sub 4-1/2" API REG PIN w/O-Ring	EBB8-01	93.0
P8-15	**Replacement O-Ring for Top Sub**	E8-15	0.1
P8-02	Piston Case w/Retainer Ring	EP8-02	173.0
P8-06	**Replacement Retainer Ring for Piston Case**	EBB8-06	0.4
P8-03	Chuck	EBB8-03-SL	24.0
P8-04	Piston	EP8-04	86.0
P8-05A	Disc Spring & Spacer Set	E8-05A	1.5
P8-07	Check Valve Dart	E8-07	1.5
P8-08	Check Valve Dart Spring	E8-08	0.3
P8-09	Check Valve Guide	E8-09	12.0
P8-10M	Rigid Valve w/O-Ring - Modified	E8-10M	15.0
P8-14	**Replacement O-Ring for Rigid Valve**	E8-14	0.1
P8-11	Choke Set	E8-11(5)	1.5
P8-11A	Blank Choke	E8-11A	0.3
P8-11B	1/8" Choke	E8-11B	0.3
P8-11C	1/4" Choke	E8-11C	0.3
P8-11D	3/8" Choke	E8-11D	0.3
P8-11E	7/16" Choke	E8-11E	0.3
P8-12	Bit Retainer Ring w/O-Ring	EBB8-12	2.0
P8-13	**Replacement O-Ring for Bit Retainer**	ET8-13	0.2
P8-18	Bearing W/ (2) O-rings	P8-18	21.0
P8-19	**Replacement O-Ring for Bearing** (uses 2)	E8-14	0.1/ea.

		Outside Diameter		Hammer Length Pin		Bit Size Range			
		IN.	MM.	IN.	MM.	IN.	MM.		
P8		7-1/8	180.97	52-1/2	1333.5	7-7/8 – 12	200.02 – 304.80		
Choke Size		200	13.8	250	17.2	300	20.7	350	24.1
IN.	MM.	PSI	BARS	PSI	BARS	PSI	BARS	PSI	BARS
Blank	Blank	692	19.59	865	24.49	1050	29.73	1250	35.39
The above air charts are based upon ideal conditions, your results may vary.									